


PROPERTY TABLE		
PARCEL ID	OWNER	
① 203618215325	TOWN OF OAK ISLAND	
② 203618215184	CASWELL 523 LLC	
③ 203618216038	AT BEACH HOMES LLC	
④ 203618216092	MBR RENTALS LLC	
⑤ 203618207957	DEATON PROPERTY INVESTMENTS LLC	
⑥ 203618208912	DURHAM BOYS MANAGEMENT LLC	
⑦ 203618209911	ROSE WAYNE P ETUX DONNA T	
⑧ 203618300778	TOWN OF OAK ISLAND	
⑨ 203618208419	TOWN OF OAK ISLAND	
⑩ 203618304596	TOWN OF LONG BEACH	
⑪ 203619500121	HUPP RUSSELL ETUX REGINA	
⑫ 203620707499	THE L B PARTNERSHIP	
⑬ 203620708457	SURFSIDE PARTNERSHIP	
⑭ 203620708592	OABH LLC	
⑮ 203620709560	HOLLENBECK JOHN I	
⑯ 203620800531	GRIFFIN THOMAS N JR ET JANE L	
⑰ 203620801511	KEEFE STEPHEN D ET CAREY	

**BEACH DISPOSAL NOTES**

- DUE TO THE AGE OF PHOTOGRAPHY, PIPELINE ROUTE SHOWN IS APPROXIMATE. THE CONTRACTOR SHALL NOTIFY THE TOWN OF OAK ISLAND NO LESS THAN 15 DAYS PRIOR TO COMMENCEMENT OF PIPELINE PLACEMENT. POINT OF CONTACT WITH THE TOWN OF OAK ISLAND IS DAVID KELLY, TOWN MANAGER, PHONE NO. 910-201-8002. PRIOR TO PLACEMENT OF PIPE, THE CONTRACTOR SHALL MEET ONSITE WITH THE CONTRACTING OFFICER'S REPRESENTATIVE AND A REPRESENTATIVE FROM THE NORTH CAROLINA WILDLIFE RESOURCES COMMISSION TO DETERMINE THE EXACT PIPELINE ROUTE. THE AGREED UPON PIPELINE LANDING SPOT ON OAK ISLAND SHALL BE SURVEYED OR OTHERWISE LOCATED AND PROVIDED TO THE CONTRACTING OFFICER OR HIS/HER DESIGNATED REPRESENTATIVE.
- VERTICAL DATUM NAVD 1988. THE CONTRACTOR IS RESPONSIBLE FOR ESTABLISHING VERTICAL CONTROL PRIOR TO PLACEMENT OF DREDGED MATERIAL IN THE DESIGNATED PLACEMENT AREA.
- THE CONTRACTOR SHALL BEGIN PLACEMENT OF DREDGED MATERIAL ON THE BEACH AT THE WEST END OF THE DESIGNATED PLACEMENT AREA OR AS DIRECTED BY THE CONTRACTING OFFICER OR HIS/HER DESIGNATED REPRESENTATIVE. DUE TO ONGOING CHANGES TO THE SHORELINE CAUSED BY OCEAN WAVES, THE EXACT BEGINNING POINT FOR PLACEMENT OF DREDGED MATERIAL WILL BE ESTABLISHED BY THE CONTRACTING OFFICER'S REPRESENTATIVE IMMEDIATELY PRIOR TO START OF DREDGING AND PLACEMENT OPERATIONS. PLACEMENT OF THE 100 FOOT WIDE BERM SHALL CONTINUE DOWN THE BEACH AS FAR AS THE QUANTITY OF DREDGED MATERIAL WILL ALLOW. THE WIDTH OF THE BERM MAY BE ADJUSTED AT THE DISCRETION OF THE CONTRACTING OFFICER'S REPRESENTATIVE.
- ALL CONTRACTOR OPERATIONS SHALL BE PERFORMED IN A MANNER THAT AVOIDS DAMAGE TO EXISTING SANDBAGS, STRUCTURES AND ROADS. SANDBAGS, STRUCTURES AND ROADS DAMAGED BY CONTRACTOR'S OPERATIONS SHALL BE REPAIRED TO THE SATISFACTION OF THE CONTRACTING OFFICER OR HIS/HER DESIGNATED REPRESENTATIVE AT NO COST TO THE GOVERNMENT OR TO THE OWNERS OF DAMAGED PROPERTY. IN ORDER TO MINIMIZE THE RISK OF DAMAGE, WHEELED OR TRACKED EARTH MOVING EQUIPMENT SHALL NOT WORK CLOSER THAN 10 FEET FROM STRUCTURES DURING ALL WORK, INCLUDING DISTRIBUTION AND MOVEMENT OF BEACH FILL MATERIAL. EXISTING SANDBAGS BELOW ELEVATION 6 FEET THAT LIE WITHIN THE BEACH FILL LIMITS SHALL NOT BE COVERED WITH FILL. IN AREAS WHERE IT IS NOT POSSIBLE TO TIE INTO THE 8-FOOT CONTOUR, THE CONTRACTOR SHALL CONSTRUCT THE BACKSLOPE TO THE NATURAL ANGLE OF REPOSE.
- THE WEST END OF OAK ISLAND IS CONSIDERED SUITABLE HABITAT FOR SHORE BIRDS. ALL WORK ON THE BEACH AT OAK ISLAND, INCLUDING PIPE REMOVAL, SHALL BE COMPLETED BY 31 MARCH 2019. SEE PARAGRAPH ENVIRONMENTAL WINDOWS OF SECTION 01 57 19 OF THE SPECIFICATIONS FOR ENVIRONMENTAL WINDOWS AND RESTRICTIONS.

**GENERAL NOTES**

- HORIZONTAL DATUM NAD 1983.
- PHOTOGRAPHY DATE: 28 MAY 2017. COPYRIGHT 2017 DIGITAL GLOBE.
- AREAS TO BE DREDGED SHOWN THUS - BASE OPTION

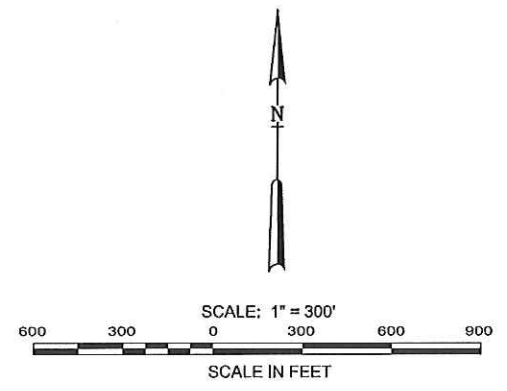

MARK	DESCRIPTION	DATE

DESIGNED BY: J. HARRISON, J. CLARKE	ISSUE DATE: JUNE 2018	CONTRACT NO.:
CHECKED BY: L. MICHAEL	SOLICITATION NO.:	
DATE:	DRAWING CODE:	
FILE NAME:		

U.S. ARMY CORPS OF ENGINEERS  
WILMINGTON DISTRICT  
68 DARLINGTON AVENUE  
WILMINGTON, NORTH CAROLINA 28403

MAINTENANCE DREDGING  
ATLANTIC INTRACOASTAL WATERWAY  
BEAUFORT TO CHARLOTTE, NORTH CAROLINA

LOCKWOODS FOLLY INLET  
CROSSING AND PLACEMENT  
AREA LOCATION MAP

SHEET ID  
**G100**